


AERODROME CHART

ATIS 126.25
 TWR 130.35(118.35,130.00)
 GND 121.75


ZGNN NANNING/Wuxu
 N22° 36.6'E108° 10.4' ELEV 128m

RWY	Direction	Bearing strength(PCN)
05	048°	RWY, A1, N, W 87/R/B/X/T
		TWY A(north of A6), 87/R/B/W/T
		TWY J5: 84/R/B/X/T Stands Nr. 13, 13A, 13B, 14, 14A, 14B: 84/R/B/W/T
23	228°	TWY A2, A4, A6, Q(east of A): 80/R/B/X/T
		TWY A(south of A6): 76/F/B/W/T
		TWY J6, Stands Nr. 15-18, 201-207: 75/R/B/W/T
		TWY Q(west of A), J4: 60/R/B/X/T Stands Nr.1-12: 60/R/B/W/T

BEARINGS ARE MAGNETIC
 ALTITUDES, DISTANCES,
 ELEVATIONS AND HEIGHTS
 IN METERS

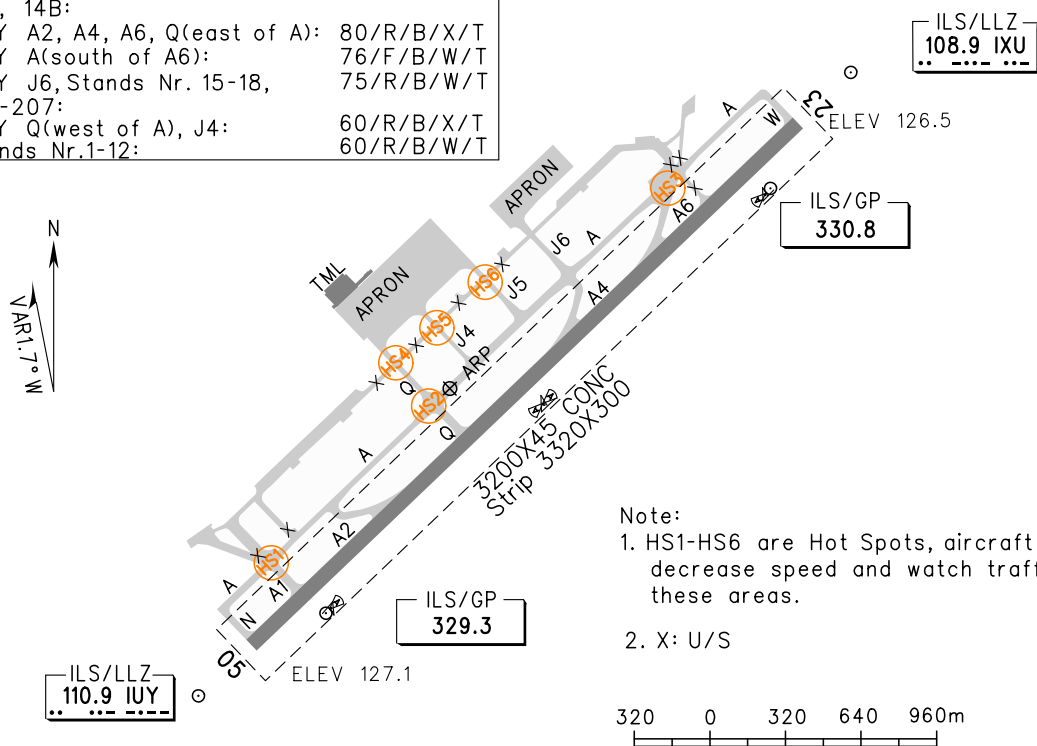

- Note:
- HS1-HS6 are Hot Spots, aircraft shall decrease speed and watch traffic at these areas.
 - X: U/S

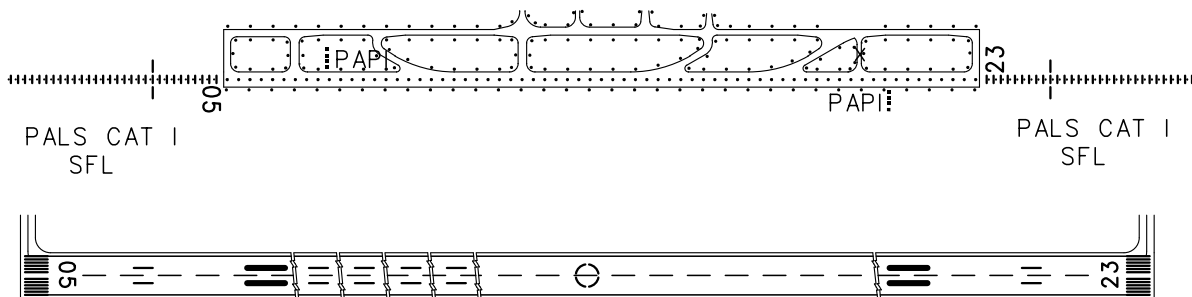

TAKE-OFF MINIMA(WITH RELIABLE ALTN)(m)				LIGHTS	
RWY	ACFT Type	REDL	NIL(Day only)	RWY05	RWY23
05/ 23	2 TURB ENG or 3&4 ENG	RVR400 VIS800	RVR500 VIS800	PALS CAT I SFL PAPI REDL RCLL	PALS CAT I SFL PAPI REDL RCLL
	Other	VIS1600			

Changes: PCN.