

AERODROME CHART



ATIS 126.25
D-ATIS 131.45

TWR 118.25(130.0)
GND 121.7
DCL 131.45


ZSAM XIAMEN/Gaoqi
N24° 32.7'E118° 07.6' ELEV18m

RWY	Direction	Bearing strength(PCN)	
05	055°	TWY B7-B9	90/R/B/W/T
		TWY A, B4-B6	85/R/B/W/T
		RWY; TWY A1	83/F/B/W/T
		TWY A3	74/F/B/W/T
23	235°	TWY B3	72/R/B/W/T
		TWY A8	65/R/B/W/T
		TWY A4, A5, A7	50/R/B/W/T

BEARINGS ARE MAGNETIC
ALTITUDES, DISTANCES,
ELEVATIONS AND HEIGHTS
IN METERS

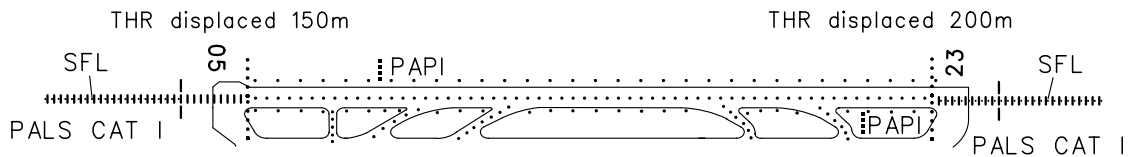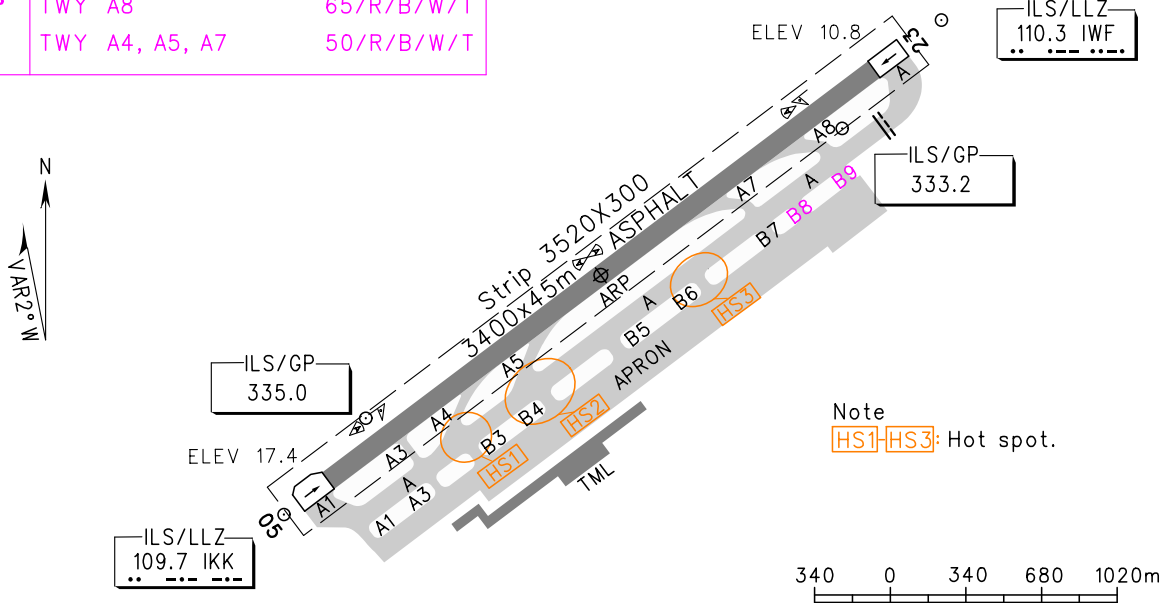

Note: RWY23 End displaced 150m inwards.



TAKE-OFF MINIMA(WITH RELIABLE ALTN)(m)					LIGHTS	
ACFT Type	RWY05		RWY23		RWY05	RWY23
	REDL	NIL(Day only)	REDL	NIL(Day only)		
2 TURB ENG or 3&4 ENG	RVR400 VIS800	RVR500 VIS800	RVR400 VIS800	RVR500 VIS800	PALS CAT I REDL RCLL PAPI SFL	PALS CAT I REDL RCLL PAPI SFL
Other	VIS1600					
RWY23: Ceiling300m/VIS5000m, if climbing gradiend below 4.0%						

Changes: Add TWY B8,B9,PCN.