


RWY	Direction	Bearing strength(PCN)
02L/ 20R	024° / 204°	TWY A1(BTN A&RWY02L/20R), A(BTN A1&A2) 106/R/B/W/T
		TWY B(BTN A2&B1), A1(BTN A&C) 104/R/B/W/T
		TWY B(BTN A1&M), C(BTN A2&M), C1, D, D1-D5 98/R/B/W/T E, E1, E2, E8, E9, M, N, RWY02R/20L
		TWY B1(BTN A&B), RWY02L/20R 88/R/B/W/T
		TWY T1(BTN stands Nr.355&360) 86/R/B/W/T
20L/ 02R	204° / 024°	TWY A(BTN A8&A9), A8(BTN A&B), A9, 85/R/B/W/T B(north of A8), B(BTN B1&B5), B3(BTN B&C), F, C3-C7, C(BTN A2&C7), C(BTN B6-B10), E(BTN E9&F), T2(BTN stands Nr.313&319), T3-T9, T10(south of T1), K1
		TWY B1(BTN B&C), C2, 83/R/B/W/T T1(BTN stands Nr.360-365), V1, V2
		TWY A2 81/R/B/W/T
		TWY A(BTN A2&A8), B3(BTN A&B), 75/R/B/W/T A3-A6, A8(BTN A&RWY), B2, B4-B10
		TWY B(BTN A1&A2), B(BTN B5&A8), A7 68/R/B/W/T
		TWY T1(BTN stands 351&355), T10(north of T1) 67/R/B/W/T T11, T2(BTN stand 319&345), K3
		TWY C8, H1-H6 62/R/B/W/T
		TWY E3, E4, E6, E7 60/R/B/W/T
		TWY H7 56/R/B/W/T
		TWY E5 55/R/B/W/T
TWY C(BTN C7&B6) 54/R/B/W/T		

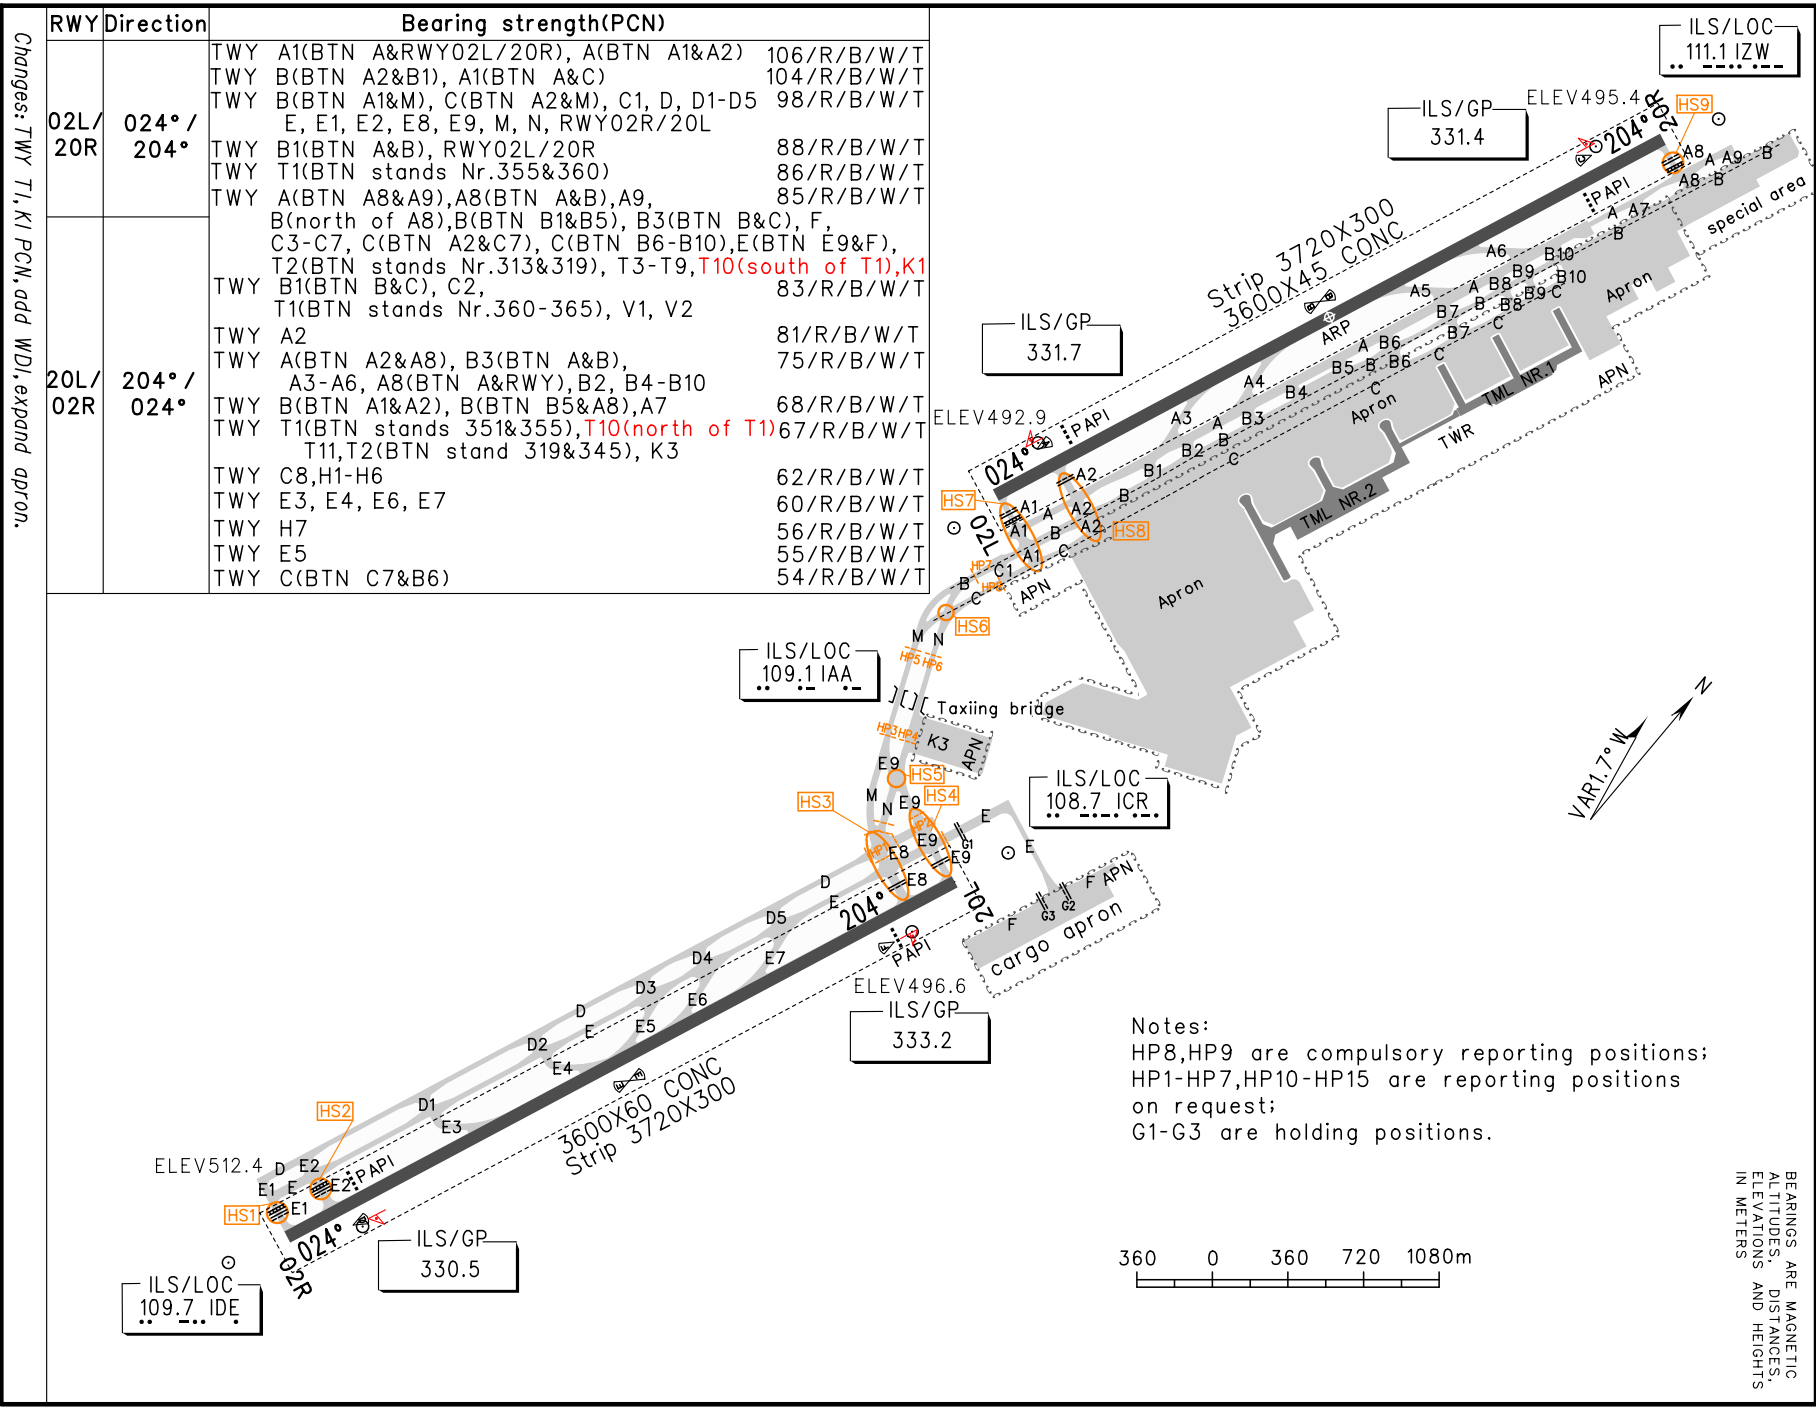

Changes: TWY T1, K1 PCN, add WDI, expand apron.

**AERODROME CHART**  
**ZUUU CHENGDU/Shuangliu**  
 Delivery 121.6(121.7)(DCL AVBL)

D-ATIS 128.6(DEP), 126.45(Arr)  
 TWR 123.0(118.85) for RWY02L/20R  
 130.35(118.85) for RWY02R/20L  
 GND 121.85(121.7) for RWY02L/20R  
 121.75(121.7) for RWY02R/20L  
 APN01 121.9  
 APN02 121.8  
 APN03 121.65  
 ELEV 512m  
 N30° 34.8'E103° 56.9' VAR1.7° W

BEARINGS ARE MAGNETIC  
 ALTITUDES, DISTANCES,  
 ELEVATIONS AND HEIGHTS  
 IN METERS

Notes:  
 HP8, HP9 are compulsory reporting positions;  
 HP1-HP7, HP10-HP15 are reporting positions  
 on request;  
 G1-G3 are holding positions.