



AERODROME CHART

ATIS 126.7
 TWR 118.1(125.0) D-ATIS 131.45
 GND 121.65 DCL 131.45

ZWWW URUMQI/Diwopu
 N43°54.5'E087°28.5' ELEV 648m

RWY	Direction	Bearing strength(PCN)
07	070°	TWY T(BTN L&K,east of A6),A5,A6,A11,J,K(south of T), KA(BTN K&J),KB(BTN K&J) 83/R/B/W/T
		TWY T(BTN stand 141&A6) 76/R/B/W/T
25	250°	RWY,TWY A,A7-A9,F,K(BTN A&RWY),L 74/R/A/W/T
		TWY H,KA,KB 74/R/B/W/T
		TWY A10,K(BTN A&T),T(BTN K&stand 141) 70/R/B/W/T
		TWY A1-A4 52/R/B/W/T
		TWY T1-T4 52/R/A/W/T

BEARINGS ARE MAGNETIC
 ALTITUDES, DISTANCES,
 ELEVATIONS AND HEIGHTS
 IN METERS

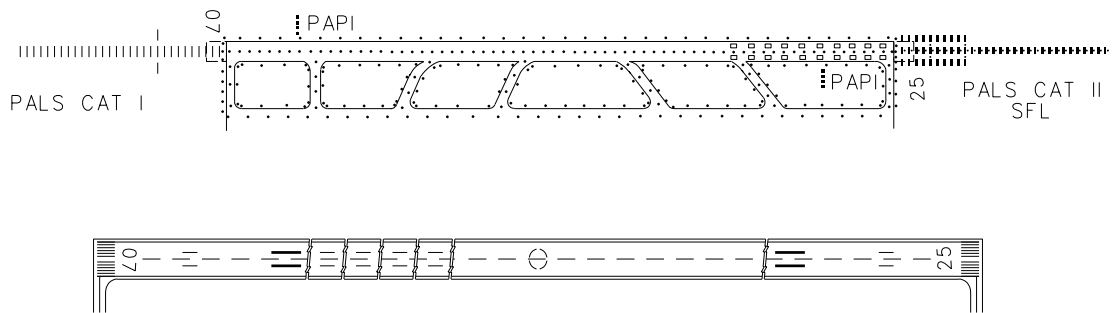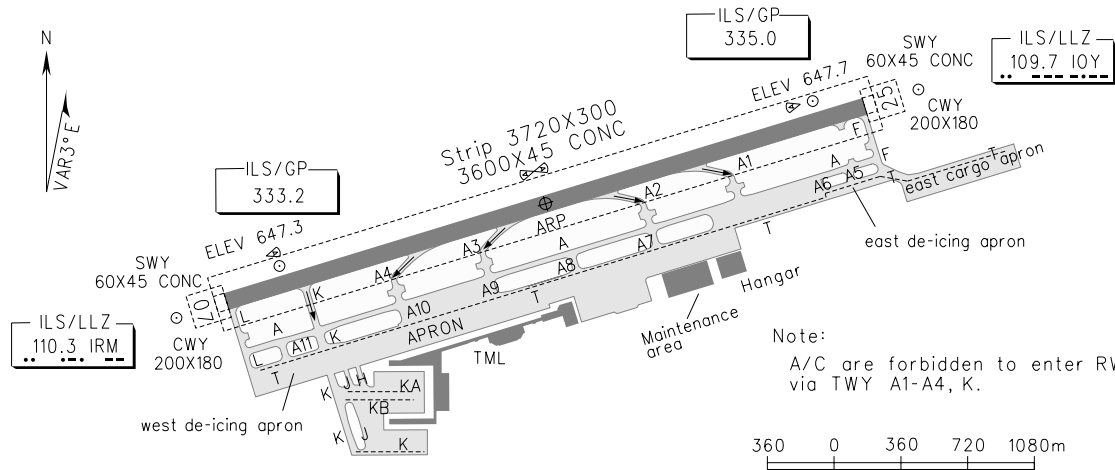

TAKE-OFF MINIMA(WITH RELIABLE ALTN)(m)				LIGHTS	
RWY	ACFT Type	REDL	NIL(Day only)	RWY07	RWY25
07/ 25	2 TURB ENG or 3&4 ENG	RVR400	RVR500	PALS CAT I REDL PAPI RCLL	PALS CAT II REDL PAPI RCLL SFL TDZL
	Other	VIS1600			

Changes: Nil.